07-31-00

A

Patent Application
Attorney Docket No. 28940-55USPT
Client Ref. No. 99-C-179

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of:

DAVID C. McCLURE and TOM YOUSSEF

For: **METHOD AND CIRCUIT FOR SWITCHOVER BETWEEN A PRIMARY AND A SECONDARY POWER SOURCE**

BOX APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. EL524957259US
Date of Deposit: JULY 27, 2000
I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

Type or Print Name: GARY B. SOLOMON

Gary B. Solomon
Signature

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

X Specification, claims and abstract of the above-referenced patent application (total of 55 pages)

X 6 sheet(s) of drawing(s) (__formal/x informal).

X Combined Declaration and Power of Attorney (unsigned)

__ An Assignment of the invention to: _____

__ _____A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.

___ Priority is claimed under 35 U.S.C. § 119 based on filing in _____.

	Application No.	Filing Date
(1)		
(2)	____	____
(3)	____	____

__ (No.) Certified copy (copies) __ are attached; or ____ were previously filed on ____.

__ Other (specify): _____

The filing fee has been calculated as shown below:

FOR: LARGE ENTITY	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				$690
TOTAL CLAIMS	32 - 20	12	$18	$ 216
INDEPENDENT CLAIMS	5- 3	2	$78	$156
MULTIPLE DEPENDENT CLAIM(S) PRESENTED			$260	$____
TOTAL FEE:				$ 1,062

X Please charge my Deposit Account No. 10-0447 in the amount of $ 1,062.00 This sheet is attached in duplicate.

__ A check in the amount of $ _____ is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 10-0447 This sheet is attached in triplicate.

X Any additional filing fees required under 37 CFR 1.16 including fees for presentation of extra claims.

X Any additional patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

X The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 10-0447. This sheet is attached in duplicate.

X Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

_ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

X Any filing fees under 37 CFR 1.16 including fees for presentation of extra claims.

JENKENS & GILCHRIST

Date: July 27, 2000

Gary B. Solomon
Registration No. 44,437

JENKENS & GILCHRIST
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
214/855-4188

Patent Application
Docket #99-C-179

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No.

EL524957259US

Date of Deposit: July 27, 2000

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231

Type or Print Name: Gary B. Solomon

Signature

METHOD AND CIRCUIT FOR SWITCHOVER BETWEEN A PRIMARY AND A SECONDARY POWER SOURCE

BACKGROUND OF THE PRESENT INVENTION

Field of the Invention

The present invention generally relates to circuitry for protection of data stored within volatile devices, and more specifically, relates to circuitry capable of reacting to a fast negative transition of a supply level from a primary power source for initiating a switchover from the primary power source to a secondary power source.

Description of the Related Art

Volatile devices require power to maintain stored data. If power is removed from the volatile devices, the stored data is

lost. Such volatile devices include volatile memory, clocks, and any other device that will lose the data upon the loss of power.

Conventional systems generally contain power source switchover circuitry for detecting that a supply level from a primary power source decreases below a threshold voltage and for initiating a switchover to a secondary or backup power source. The switchover to the secondary power source maintains power to the volatile elements to avoid loss of the stored data. However, the power source switchover circuitry utilized to switch from the primary power source to the secondary power source in conventional systems is designed to be stable over temperature and process corners, and not designed to respond to a fast ramp-down or negative transition of the supply level of the primary power source.

System designers have recently been interested in designing systems capable of performing a fast ramp-down of the primary power source. This presents a problem as the power source switchover circuitry in conventional systems cannot initiate a switchover from the primary source to the secondary power source for a fast ramp-down of the supply level of the primary power

source (i.e., the fast ramp-down of the supply level is not detected by the power source switchover circuitry).

SUMMARY OF THE INVENTION

To overcome the shortcomings of the power source switchover circuitry in conventional systems, a circuit and method for responding to a fast ramp-down of a supply level from a primary power source and for performing a switchover from the primary power source to a secondary power source to preserve stored data in memory elements is presented. The circuit and method, according to the principles of the present invention, allow a system designer to account for ramp-down of the primary power source at faster rates than in conventional systems.

One embodiment of the present invention includes an integrated circuit for providing a switchover from the primary power source to the secondary power source. The integrated circuit includes a power source switchover circuit for detecting the supply level of the primary power source and a voltage threshold of the power source switchover circuit. The power source switchover circuit has a first input terminal selectively coupled to the primary power source and a second input terminal

selectively coupled to the secondary power source. A comparator is coupled to the power source switchover circuit for indicating that the supply level of the primary power source decreases below the voltage threshold. The integrated circuit further includes a forced power source switchover circuit for detecting that the supply level of the primary power source drops below a predefined threshold level. A switchover circuit on the integrated circuit initiates a switchover operation based upon a switchover indication from the comparator or upon an indication that the forced power source switchover circuit detects that the supply level being received from the primary power source drops below the predefined threshold level.

Another embodiment according to the principles of the present invention is a method for performing a power source switchover from the primary power source to the secondary power source. The method includes detecting that a supply level being received from the primary power source decreases below a predefined threshold level from a steady-state operating level, where the decrease occurs faster than a predetermined negative rate of change. The method asserts a signal indicating to switch from the primary power source to the secondary power

source upon detecting that the supply level being delivered from the primary power source has decreased below the predefined threshold level. A detection of the signal indicating to switch from the primary power source to the secondary power initiates a switch from the primary power source to the secondary power source.

Another embodiment according to the principles of the present invention is a system having at least one volatile device for maintaining data, a forced power source switchover circuit for detecting a drop in a supply level below the predefined threshold level from the primary power source, and a switchover circuit for asserting a switchover from the primary power source to a secondary power source to prevent the volatile device from losing data upon power being removed from the volatile device. The forced power source switchover circuit reacts to the supply level transitioning from a steady-state operating level to a predefined threshold level, the supply level transitioning at a rate faster than a predetermined negative rate of change. The system may be a memory system, a computing system, a communications system and/or a clock system. The volatile device may be a memory device or a clock device.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the system, method, and apparatus of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

FIGURE 1 is a high-level block diagram of a circuit to provide a switchover from a primary power source to a secondary power source;

FIGURE 2 is an exemplary circuit as structured according to FIGURE 1;

FIGURE 3 is an exemplary graph of the output signals of the power source switchover circuitry according to FIGURE 2;

FIGURE 4 is an exemplary system block diagram having volatile elements and circuitry to provide a switchover as provided by FIGURES 1 and 2;

FIGURE 5 is an exemplary flow diagram for providing a switchover from the primary power source to the secondary power source according to FIGURES 1 and 2; and

FIGURE 6 is an exemplary graph of a fast decrease of the signal level of the primary power source causing the

switchover to the secondary power source according to FIGURES 1 and 2.

DETAILED DESCRIPTION OF THE DRAWINGS

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

Systems that utilize volatile elements, such as a volatile memory or clock to maintain stored data or current time, respectively, must provide a secondary power source to the volatile elements to avoid a loss of information from the volatile elements upon a power ramp-down from a primary power source. In order to protect the systems against loss of power to volatile elements, switchover circuitry for responding to ramp-down of the supply level of the primary power source is coupled to the volatile memory elements. Upon the supply level of the primary power source decreasing below a predefined

threshold level, the switchover circuitry initiates a switchover from the primary power source to the secondary power source. A forced power source switchover circuit, which is included within the switchover circuitry according to the principles of the present invention, responds to a fast ramp-down of the supply level of the primary power source. The forced power source switchover circuit may be circuitry added in addition to a power source switchover circuit presently in the conventional systems. The forced power source switchover circuitry is fail-safe circuitry to force the switchover of the primary power source to the secondary power source. Upon the supply level of the primary power source reaching a trip point of the forced power source switchover circuitry, which is lower than the trip point of the power source switchover circuitry, the forced power source switchover circuitry 120 initiates a switchover from the primary power source to the secondary power source.

FIGURE 1 is a high level block diagram of circuitry to provide the switchover from the primary power source to the secondary power source. A portion of circuitry 100 of a system that provides and monitors power to the volatile devices within the system is shown. Monitor (i.e., detection) and switchover

circuitry 101 is utilized for monitoring the power being delivered from the primary power source and switching to the secondary power source upon either the supply level of the primary power source transitioning below a first or a second voltage threshold. The second voltage threshold being reached if the supply level of the primary power source transitions faster than a predetermined negative rate of change (e.g., 150 microseconds). The power and control circuitry 102 receives and delivers power and control signaling to the monitor and switchover circuitry 101. Alternatively, the power and control circuitry may be included within the monitor and switchover circuitry 101.

Power source switchover circuitry 103 (having reference point trimming) has output signals VREF 104 and VA3 105, which are indication signals. The indication signals indicate the relative voltage levels of a supply level VCCEXT on line 106 from the primary power source (not shown) and the voltage potential of the substrate on line 108. It should be understood that the supply level of the primary power source may be received as either voltage or current. A reference level VSS on

line 110 is received by the power source switchover circuitry 103, where VSS is generally ground.

A power source switchover comparator 112 receives the signals on the VREF line 104 and the VA3 line 105 as inputs. The power source switchover comparator 112 logically compares the input signals, VREF 104 and VA3 105. When the VREF signal 104 becomes lower than the VA3 signal 105 (i.e., supply level of the primary power source below the voltage potential of the substrate), then the output signal, BCOMPOUT 114, of the power source switchover comparator 112 becomes a high logic level. The BCOMPOUT signal 114 becoming a high logic level is a trigger for initiating a switchover from the primary to the secondary power source. It should be understood that the comparator 112 may be included within the power source switchover circuitry 103.

Switchover logic circuitry 116 receives the BCOMPOUT signal 114 as an input signal. The BCOMPOUT signal 114 is one input signal that the switchover logic circuitry 116 utilizes in initiating the switchover from the primary power source to the secondary power source.

Trimming circuitry 118 is connected to forced battery switchover circuitry 120. The trimming circuitry 118 connects to the forced power source switchover circuitry 120 via a trip point adjustment (TPA) bus 122. The trimming circuitry 118 receives a supply level from the primary power source via the power and control circuitry 102. Additionally, a pulse signal, VOKPUL 124, is received by the trimming circuit 118 for post-trimming functionality. The trimming circuitry 118 is used to adjust a trip point for the forced battery switchover circuitry 120 to provide an indication signal. The forced power source switchover circuitry 120 is capable of detecting the ramp-down of the primary power source at a rate faster than a predetermined negative rate of change. The trip point is generally trimmed for 2.0 volts at 85 Celsius, which will be raised by 400 millivolts at zero Celsius to become 2.4 volts.

The power and control circuitry 102, again, is used for delivering the supply levels of the power sources and control signals to the monitor and switchover circuitry 101. The control signals are generally used for configuring the switchover logic circuitry 116 in various states. Primarily, the states that the switchover logic circuitry 116 are

configured include normal operating mode and trimming mode. The control signals include TMO 126, PDINHIB 128, BATFLOAT 130, and TCAL 131. By setting these control signals to particular logic levels, the switchover logic circuitry 116 is responsive to the BCOMPOUT signal 114 from the power source switchover comparator 112 and a forced switchover signal (FSO) 132 from the forced battery switchover circuitry 120. A voltage switchover signal (VSO) 134 is an output from the switchover logic circuitry 116. The VSO signal 134 is delivered to a switch circuit 136, which switches the supply signal (i.e., power source) being applied to the volatile elements to protect against data loss.

As previously described, the monitor and switchover circuitry 101 is capable of two modes, normal operating mode and trimming mode. The trimming mode includes two different trimming modes. The first trimming mode is for setting a crossover level (i.e., trip point) between the VREF signal 104 and the VA3 signal 105 as detected by the power source switchover circuitry 103. The second trimming mode is for setting a trip point for the forced battery switchover circuitry 120. Both of these trimming modes are selectable by applying the control signals in particular states so that the switchover

logic circuitry 116 responds either to the BCOMPOUT signal 114 or the FSO signal 132. The VSO signal 134 can be monitored by a special pad to determine the state of either the BCOMPOUT signal 114 or the FSO signal 132 being received by the switchover logic circuitry 116. Once the trimming operations are completed, the monitor and switchover circuitry 101 is configured in the normal operating mode, which monitors the signal level being received from the primary power source and switching over to the secondary power source upon the supply level from the primary power source transitioning below the trip points as set during the trimming mode. The normal operating mode and the trimming modes will be described in more detail with reference to FIGURE 2.

FIGURE 2 is one embodiment for a circuit level representation of the monitor and switchover circuitry 101 according to the principles of the present invention. Dashed boxes around the various circuit elements represent each of the blocks shown in FIGURE 1, including the power source switchover circuitry 103, the switchover comparator 112, the trimming circuitry 118, the forced battery switchover circuitry 120, and the switchover logic circuitry 116.

When configured for normal operation, in general, the combination of the power source switchover circuitry 103 and comparator 112 detect when the primary power source drops below the trip point or predefined threshold level (e.g., 2.5 volts) of the power source switchover circuitry 103 and provide an indication signal BCOMPOUT 114 to the switchover logic circuitry 116 for switching from the primary power source to the secondary power source. However, the power source switchover circuitry 103 is not capable of reacting to fast ramp-down rates of supply level of the primary power source, but maintains a stable trip point over temperature variations. To provide for a power source switchover for fast ramp-down of the supply level from the primary power source, the forced power source switchover circuitry 120 is designed to provide an indication or fast switchover signal (FSO) 138 to the switchover logic circuitry 116. While the forced power source switchover circuitry 120 is capable of reacting to a fast ramp-down of the supply level from the primary power source, the trip point of the forced power source switchover circuitry 120 varies over temperature. The FSO signal 138 forces a switchover from the primary power source to the secondary power source upon the supply level of the

primary power source reaching the trip point set during the trimming mode for the forced power source switchover circuitry 120 that is set below the trip point of the power source switchover circuitry 103. The switchover logic circuitry 116 contains circuitry for responding to the indication signals, BCOMPOUT 114 and FSO 132, and asserting the switchover from the primary power source to the secondary power source.

Specifically, the power source switchover circuitry 103 detects a ramp-up of the supply level of the primary power source. The detection is performed primarily by transistor 210 and indicated by the VREF signal 104. The signal level (VCCEXT 106) of the primary power source is indicated by the VA3 signal 105. The VREF signal 104 is computed as VCCEXT 106 minus the voltage drop of the base to emitter of the bipolar transistor 210 minus the voltage drop across the resistor 215. The VA3 signal 105 is an indication of the voltage level of VCCEXT 106. The comparator 112 compares the VREF signal 104 and the VA3 signal 103. If the VREF signal 104 is above the VA3 signal 105, then the primary power source is utilized to supply power to the volatile elements. Upon the VREF signal 104 transitioning below the VA3 signal 105, the switchover from the primary power source

to the secondary power source is initiated by the switchover logic circuitry 116.

The volatile elements (not shown) are specified to operate at 2.6 volts by system designers. Additionally, the system designers specify that the internal backup battery is to last for ten years. In order for the battery to last for ten years, the battery cannot be required to supply more than 600 nanoamps to operate the volatile elements (e.g., random access memory). For example, to perform standard read and write operations for a random access memory, 20 milliamps are drawn from a power source. At that rate, the battery would only be able to supply the RAM for approximately one second. So, if a battery is used for the secondary power source, it can only be used to maintain the contents of the volatile elements and not to perform standard read and write operations.

To meet the above specifications, it is desired that the supply level being received from the primary power source be switched to being received from the secondary power source and vice versa when the supply level from the primary power source crosses the predefined threshold level of the power source switchover circuitry 103. The predefined threshold level of the

power source switchover circuitry 103 is generally below a minimum operating level (i.e., 2.6 volts) of the volatile elements. The preferred embodiment has its predefined threshold level set to 2.5 volts, but other levels are possible.

The power source switchover circuitry 103 contains start-up circuitry 200 coupled to the VCCEXT line 106 and current mirror circuitry 205. The current mirror circuitry is coupled to the gate of the transistor 210, which has its collector connected to the VCCSUB line 108 and its emitter connected to a resistor 215. The other terminal of the resistor is connected to a gate of a P-channel transistor 220. The line connecting the resistor 215 and the gate of the P-channel transistor 220 provides the VREF signal 104. The source of the P-channel transistor 220 is coupled to VCCEXT 106 and the drain is coupled to the gates of two N-channel transistors 225 and 226, which have their source terminals connected to VSS 110. Coupled between the source terminal of the P-channel transistor 220 and the drain channel of the N-channel transistor 226 are a series of resistors, RA, R1-R6, and RB, which form a voltage divider. A node coupled between the R3 and the R4 resistor provides the VA3 signal 105. In parallel to each of the resistors R1-R6 are fuses f1-f6,

respectively, that are used to adjust or trim the value of the voltage divider, which generates the VA3 signal 103.

When ramping-up the primary power source, the VCCEXT signal 106 provides a boost to the startup circuitry, which causes the current mirror circuitry 205 to operate. Upon the gate terminal receiving current flow, the transistor 210 will begin to lower the impedance across its collector and emitter terminals and a voltage level is developed at the VREF node 104. Simultaneously, a voltage is developed at the VA3 node 105 as dictated by the voltage divider from the resistors RA, R1-R6, and RB taking into account the status of fuses f1-f6. At the trip point, the voltage level of the VREF signal 104 and the VA3 signal 105 cross as the VREF signal 104 has a steeper slope than the VA3 signal 105. The trip point for the power source switchover circuitry 103 and is generally set for 2.5 volts. It should be noted that during the time that the monitor and switchover circuitry 101 is powered on the secondary power source, such as a battery, the substrate is at the level of the secondary power source, such as 3V. When the substrate is powered by the secondary power source at 3V, all of the P-channel transistors are in a weak inversion state (i.e., back

bias mode) until the switchover from the secondary to the primary power source occurs and the voltage potential of the substrate drops to the supply level of the primary power source.

Referring to FIGURE 3, an exemplary graph of the output signals of the power source switchover circuitry 103 is shown. As shown, the VREF signal 104 has a steeper slope than the VA3 signal 105. The point where the VREF signal 104 crosses the VA3 signal 105 is trip point 300 for the power source switchover circuit. The trip point 300 is generally trimmed to occur at 2.5 volts. However, the trip point 300 can be trimmed for other voltages by selectively blowing fuses f1-f6 to create different voltage divider values. To raise the trip point 300, any combination of fuses f4-f6 are blown, and to lower the trip point 300, any combination of f1-f3 are blown. It should be noted that the trip point occurs at the same voltage level whether the primary power source is ramping up or ramping down and the trip point varies minimally over temperature.

Referring again to FIGURE 2, at the trip point 300, the BCOMPOUT signal 114 switches from a high to a low logic level when the primary power source is ramping up. It should be noted that the VREF signal 104 is equal to the VCCEXT 106 minus

approximately 1.2 volts, which is the result of the voltage drop of the transistor 210 and the voltage drop across the resistor 215.

The forced power source switchover circuitry 120 includes a P-channel transistor Q1, two N-channel transistors Q2 and Q3, and a multiple number of P-channel transistors Q4-Q9 and Q14-Q21. The source terminal of the P-channel transistor Q1 is connected to VCCEXT 106 (i.e., the primary power source) and the gate and drain terminals are tied together. The drain terminal of the P-channel transistor Q1 is connected to the drain terminal of the N-channel transistor Q2. The node formed by the drain terminals of Q1 and Q2 is designated node N1 and is further connected to the gate terminal of the N-channel transistor Q3. The source terminal of the N-channel Q2 is connected to VSS 110 (i.e., ground) and the gate terminal is connected to VCCSUB 108. The source terminal of the N-channel transistor Q3 is connected to VSS 110 and the drain terminal of the N-channel transistor Q3, designated as node N2, connects to the drain terminals of Q4-Q9 and Q21. Additionally, the node N1 is coupled to the gate terminals of the P-channel transistors Q14-Q20. The source terminals of the P-channel transistors Q14-

Q20 are connected to the VCCEXT line 106. The gate terminals of Q4-Q9 are connected to the trip point adjustment bus 122, which is coupled to circuitry within the trimming circuitry 118. Finally, an inverter 230 has its input connected to the node N2 and outputs the forced switchover signal (FSO) 138.

In operation, the forced power source switchover circuitry 120 operates to force a switchover from the primary power source to the secondary power source upon the supply level of the primary power source transitioning below a predefined threshold level (e.g., 2.0 volts). The configuration of Q1, Q2, and Q3 functions to react to a fast transition of the supply level of the primary power source. The forced power source switchover circuitry 120 is designed to have its trip point at 2.0 volts at a temperature of 85 Celsius, which is raised by 400 millivolts at zero Celsius to become 2.4 volts.

The configuration of Q1, Q2, and Q3 operates in the following manner. Upon VCCEXT 106 transitioning below 2V, Q1 does not receive enough voltage to be turned on, so Q2 pulls node N1 low. Upon node N1 going low, node N2 transitions from a low to a high due to the VCCEXT signal 106 becoming coupled through at least the P-channel transistors Q20 and Q21.

Additionally, depending upon the trimming circuitry 118 configuration, the VCCEXT signal 106 may be coupled through transistor pairs Q14/Q4, Q15/Q5, Q16/Q6, Q17/Q7, Q18/Q8, and Q19/Q9. Also, Q14-Q19 track with Q1 across the process variations.

As was the case with the power source switchover circuitry, the P-channel transistors in the forced power switchover circuitry 120 are in back bias mode because the VCCEXT 106 is low and the substrate has the voltage potential approximately equal to the supply level of the secondary power source, which is essentially 3V when using a battery. Because the P-channel transistor Q1 is in a weakened state when the secondary power source is supplying the monitor and switchover circuitry 101, the N-channel transistor Q2 has a strong influence over node N1. The P-channel transistor Q1 is in a weakened state while VCCEXT 106 is below 2.5V (i.e., the trip point of the power source switchover circuitry 103). Upon the switchover to the primary power source, the substrate drops to the supply level of VCCEXT 106 in approximately 50 nanoseconds and the P-channel transistor Q1 transitions into a normal operating state.

The timing circuitry 118 comprises circuitry for enabling and disabling the P-channel transistors Q4-Q9. As configured, the transistors Q4-Q6 are defaulted on and the transistors Q7-Q9 are defaulted off. As shown, fuses f7-f12 are used for trimming to set the voltage levels of the trip point adjustment bus 122. For example, for P-channel transistor Q4, if the fuse f7 is blown, then the input to the gate of the P-channel transistor Q4 becomes a high logic level, which turns off the P-channel transistor Q4. The circuitry accompanying fuses f8-f12 have the same circuitry (i.e., the parallel N-channel transistors and inverter) connected to fuse f7; however, inverters 235 are included on the output of the circuitry accompanying fuses f10-f12 so that the default of P-channel transistors Q7-Q9 are off.

The forced power switchover circuitry 120 has its trip point set at 2.0 volts, as previously discussed. To make a stronger or weaker pull-up for the P-channel transistor Q1, the fuses f7-f12 are blown. To decrease the trip point, fuses f7-f9 may be blown, and to increase the trip point, fuses f10-f12 may be blown. It should be understood that the trip point may need adjustment due to process deviations when fabricating the integrated circuit. When the voltage potential of VCCSUB 108

crosses the supply level of VCCEXT 106, P-channel transistor Q1 in conjunction with N-channel transistor Q3 cause the FSO signal 138 to transition from low to high at 2V, for example.

Thus far, the power source switchover circuitry 103 and the forced power source switchover circuitry 120 have been discussed for both normal operating mode and trimming mode. To fully understand the operation of the monitor and switchover circuitry 101, however, the integration of the power source switchover circuitry 103 and the forced power source switchover circuitry 120 with the switchover logic circuitry 116 must be discussed. The switchover logic circuitry 116 is utilized for configuring the monitor and circuitry 101 to operate in normal operating mode and trimming modes.

The switchover logic circuitry 116 comprises logic gates, a delay element, and transistors configured as logical elements. These components are configured to receive the control signals from the power and control circuitry 102, including TM0 126, PDINHIB 128, BATFLOAT 130, and TCAL 131. The two switchover indicators, BCOMPOUT 114 and FSO 138, are also received by the switchover logic circuitry 116. As previously discussed, the monitor and switchover circuitry 101 operates in two modes,

normal operating mode and trimming mode. In the normal operating mode, each of the control signals are forced to a low logic levels when the primary power source is driving the monitor and switchover circuitry 101. In the trimming mode, the control signals are configured to (1) ignore the FSO signal 138 so that the transition of the BCOMPOUT signal 114 can be detected for trimming the power source switchover circuitry 103, and (2) ignore the BCOMPOUT signal 114 so that the transition of the FSO signal 138 can be detected for trimming the forced power source switchover circuitry 120. By selectively detecting each of the switchover signals (i.e., BCOMPOUT 114 and FSO 138), trimming of the trip points of the power source switchover circuitry 103 and the forced power source switchover circuitry 118 can be performed on a single test station. Once each of the trip points have been measured, the trip point of the power source switchover circuitry 103 measured on the positive transition of the supply level of the primary power source and the trip point of the forced power source switchover circuitry 120 measured on the negative transition of the supply level of the primary power source, for example, then the appropriate fuses can be blown to adjust the trip points.

NORMAL OPERATING MODE

There are three conditions that can occur in the normal operating mode. First condition: the monitor and switchover circuitry 101 can be receiving power from the secondary power source and the primary power source can transition from a low to a high power level. Second condition: the primary power source can be supplying the monitor and switchover circuitry 101 with a normal operating power level and transition to a low power level at a rate slower than a predetermined rate of change. Third condition: the primary power source can be supplying the monitor and switchover circuitry 101 with the normal operating power level and transition to a low power level, the transition occurring at a rate faster than a predetermined rate of change.

The first condition of the normal operating mode detects transitions of the signal level of the primary power source from a low to a high signal level. The VREF signal 104 will cross the VA3 signal 105 at the trip point of the power source switchover circuitry 103 as the supply voltage of the primary power source ramps-up. As previously discussed, the preferred embodiment sets the trip point of the power source switchover circuitry 103 to 2.5V. At the trip point of the power source

switchover circuitry 103, the BCOMPOUT signal 114 transitions from a high to a low logic level indicating that the VREF signal 104 is higher than the VA3 signal 105 (i.e., the primary power source is at a normal operating level). The transition of the BCOMPOUT signal 114 causes the monitor and switchover circuitry 101 to switch from the secondary power source to the primary power source. When the BCOMPOUT signal goes high, the output of the nor gate 235, node N3, transitions from a low to a high logic level. Node N3 is also an input to the delay element 240. The delay element 240 may comprise a plurality of delay components (e.g., inverters) within the delay element 240 to delay the input signal by 350 nanoseconds, for example. The output of the delay element 240, node N4, transitions 350 nanoseconds after the transition of node N3.

The purpose for delaying the high to low logic level transition of node N4 by 350 nanoseconds is the following: as the external power supply is ramped-up while the monitor and switchover circuitry 101 is in normal operating mode, the LVDISB signal is high (i.e., TM0 is low), and the BCOMPOUT signal 114 transitions to a low logic level at 2.5V. As soon as the BCOMPOUT signal 114 becomes a low logic level, the device is

powered by the external power supply. If the secondary power supply is a battery, the battery creates a voltage potential on the substrate of approximately 3V. When the switchover from the secondary power source to the primary power source occurs, about 50 nanoseconds is necessary for the voltage potential on the substrate to transition from 3V to approximately 2.5V, which is the trimmed reference of the power source switchover circuitry 103. Until the substrate settles at 2.5V, all the P-channel transistors are in back bias mode and the secondary trip point produces an unwanted hysteresis, which is a second trip point at a higher value (e.g., 2.9V). By delaying node N4 (and node N10) from transitioning for 350 nanoseconds, the 50 nanosecond transition requirement for the substrate to drop from 3V to 2.5V is satisfied and any unwanted transitions of the FSO signal 138 during the transition of the voltage potential on the substrate are ignored. Upon the voltage potential of the substrate transitioning to the supply level of the primary power source, the trip point of the forced power source switchover circuitry 120 becomes 2.0V at 85C and the power source switchover circuitry 120 starts to operate in normal mode (i.e., the P-channel transistors are no longer in back bias mode).

Continuing with the transition of the primary power source from low to high in the normal operating mode, when both the N3 and the N4 nodes are low, the nor gate 245 outputs a high logic level, which causes both of the inputs to nand gate 250 to be high and driving the output of the nand gate 250 to be low. The output of the nand gate 250 is node N10 136 (also indicated as input terminal C into nor gate 255). However, since the FSO signal 138 on node A of the nor gate Q10 is a high logic level, the output, LVSWITCH 140 of the nor gate Q10 remains low. As PDINHIB 128 transitions from high to low upon the primary power source becoming powered-up, a low logic level is applied to output stage 265, which becomes configured to transition the VSO signal 134 to a low logic level. The VSO signal 134 being a low logic level transitions the switch 136 to apply the primary power source (i.e., VCCEXT 106) to the volatile elements.

The second condition of the normal operating mode occurs when the primary power source is sourcing the monitor and switchover circuitry 101 with a steady-state signal level and decreasing the signal level below a predefined threshold level, the decrease occurring at a rate slower than a predetermined negative rate of change (e.g., more than 150 microseconds).

This condition operates in a similar manner as the circuitry in the conventional systems as the power source switchover circuitry 103 is capable of detecting the decrease of the signal level of the primary power source.

Upon the power source switchover circuitry 103 detecting the signal level of the primary power source transitioning below the trip point (i.e., approximately 2.5V), the BCOMPOUT signal 114 transitions from a low to a high logic level. The LVSWITCH signal 140 remains a logic low during the slow ramp-down as the FSO signal 138 remains a high logic level. The output of the nor gate 260 transitions from a high to a low logic level, which causes the VSO signal 134 to transition to a high logic level and the switch 136 to switch the secondary power source to the supply the non-volatile elements.

The third condition of the normal operating mode allows the system designer to increase the ramp-down of the primary power source and not lose stored data in volatile elements. As discussed earlier, the fast ramp-down (e.g., faster than 150 microseconds) is not detected by the power source switchover circuitry 103 so that the BCOMPOUT signal 114 does not transition from a low logic level to initiate a switchover to

the secondary power source as the signal level of the primary power source crosses the trip point of the power source switchover circuitry 103.

Upon the signal level of the primary power source crossing the trip point of the forced power source switchover circuitry 120, the FSO signal 138 transitions from a high to a low logic level. The transition of the FSO signal 138 is produced by the configuration of the transistors Q1, Q2, and Q3 as previously discussed. Because the other two input terminals (i.e., TCAL and node N10) to the nor gate 255 remain low, the transition of the FSO signal 138 to a low logic level causes the LVSWITCH signal 140 to become a high logic level and the VSO signal 134 to become a high logic level. The VSO signal 134 becoming a high logic level, in turn, causes the switch 136 to switch from the primary power source to the secondary power source. The monitor and switchover circuitry 101 receives the signal level of the secondary power source and the volatile element does not lose stored data. Because the forced power source switchover circuitry 120 initiates the switchover extremely quickly, there is no danger of the volatile elements losing the stored data.

TRIMMING MODES

Prior to setting the monitor and switchover circuitry 101 in the normal operating mode, both the power source switchover circuitry 103 and the forced battery switchover circuitry 120 are configured or trimmed to set the trip points (i.e., the signal level of the primary power source that each circuit indicates a switchover). As previously discussed, the trip point of the power source switchover circuitry 103 (i.e., primary trip point) is set to approximately 2.5V and the trip point of the forced power source switchover circuitry 120 (i.e., secondary trip point) is set to 2.0V. Although the trimming operation of the individual circuits has previously been discussed, the following includes configuring the switchover logic circuitry 116 to react only to one or the other circuits (i.e., detect either the BCOMPOUT signal 114 or the FSO signal 132).

To configure the switchover logic circuitry 116 for monitoring the trimming operation of the power source switchover circuitry 103, the TM0 control signal 126 is set to a high logic level. By setting the TM0 control signal 126 high, LVDISB is low and node N10 136 is high, forcing LVSWITCH 140 low so that

the FSO signal 138 is effectively ignored by the output stage 265. Upon the primary power source ramping up (or down), the BCOMPOUT signal 114 transitions when crossing the trip point of the power source switchover circuitry 103. In the case of the primary power source ramping-up, the nor gate 260 outputs a low logic level to the output stage 265 and the VSO signal 134 transitions from a high to a low logic level, which causes the switch to apply the VCCEXT signal to the substrate. The substrate can be monitored to determine the trip point of the power source switchover circuitry 103 and appropriate trimming can be performed by blowing any combination of fuses f1-f6.

To configure the switchover logic circuitry 116 for monitoring the trimming operation of the forced power source switchover circuitry 103, the BATFLOAT control signal 130 is set to a high logic level and TM0 is set to a logic low logic level. The BCOMPOUT signal is therefore effectively ignored. When the signal level of the primary power source decreases below the trip point of the forced power source switchover circuitry 103, the FSO signal 138 transitions from a high to a low logic level, which causes the LVSWITCH signal 140 and the VSO signal 134 to transition from a low to a high logic level. The switch 136

applies the secondary power source to the substrate upon the VSO signal 134 becoming a high logic level. The substrate can be monitored to determine the trip point of the forced power source switchover circuitry 120. Trimming of the fuses f7-f12 can be adjusts the trip point of the forced power source switchover circuitry 120.

FIGURE 4 is an exemplary system 300 that includes the power source switchover circuitry according to the principles of the present invention. The exemplary system 300 includes a processor 304, the monitor and switchover circuitry 101, a memory 306, a clock 308, and power circuitry 310. The power circuitry 310, which may include power regulation circuitry (not shown), is connected to an external power source 312 providing Vext 314 to the power circuitry and to an external battery 316 providing Vbatt 318 to the power circuitry. The primary and secondary power sources may be external, internal, or a combination of external and internal power sources.

In addition to the processor 304 providing functionality to the system 300, the processor 304 interfaces with the memory 306 and the monitor and switchover circuitry 101. The processor is connected to the memory 306 via a data bus 320 and an address

bus 322. The processor is further connected to the monitor and switchover circuitry 101 via a control bus 324 to provide control information to the monitor and switchover circuitry 101. The control bus 324 may include mode information to, for example, place the monitor and switchover circuitry 101 in test mode or in normal operating mode.

The monitor and switchover circuitry 101 includes switchover detector circuitry 310 and the switchover logic circuitry. Although not shown, the switchover detector circuitry includes the elements of the monitor and switchover circuitry 101 excluding the switchover logic circuitry 116. The switchover detector circuitry outputs two switchover indicator signals, BCOMPOUT 114 and FSO 138, which indicate that the supply level of the primary power source is above or below a predefined threshold level.

The power circuitry 310 receives the power for the system 300 and delivers the power to the other components within the system 300. The power circuitry 310 is controlled via the VSO signal 134, which initiates a switch from the external power source 312 to the external battery 316 if the supply level Vext 314 of the external power source 312 drops below a predefined

threshold. The memory 306 and the clock 308 are volatile elements, so both are prevented from losing power during a supply level decrease, either slower or faster than a predetermined negative rate of change, via the monitor and switchover circuitry 101 as described with reference to FIGURES 1 and 2.

The system 300 may be a self-contained unit, such as a communication device, a computing device, or a clock. Examples of a communication device include: a mobile telephone, a personal communicator, and a pager. Examples of a computing device include: a personal computer, a portable computer, a hand-held computer, and a calculator. It should be understood that the principles of the present invention may be applied to any system or device that includes volatile elements and is not limited to the exemplary systems as herein presented.

Referring to FIGURE 5, an exemplary flow diagram 500 of the process for performing a power source switchover within a system according to the principles of the present invention is presented. The process starts in normal operating mode at step 505 and power from the primary power source is applied at step 510. Prior to the primary power source applying power at step

510, the system may be receiving power from a secondary power source.

At step 515, a determination is made as to whether the power from the primary power source has dropped below a predefined threshold level. The predefined threshold level is set in a trimming mode, generally at a substrate level, prior to starting the normal operating mode. The determination 515 is performed by the monitor and switchover circuitry 101. Within the monitor and switchover circuitry 101, both the power source switchover circuitry 103 combined with the power source switchover comparator 112 and the forced power source switchover circuitry 120 act to perform the determination 515. If the determination is negative, then the system continues to monitor the supply level of the primary power source by effectively looping the step of determining 515. If the determination is positive (i.e., a determination has been made that the supply level of the primary power source has dropped below a predefined threshold level), then a switchover signal based upon a negative rate of change of the supply level is applied at step 520. If the supply level of the primary power source drops slower than a predetermined negative rate of change (e.g., 150

microseconds), then the switchover signal (i.e., BCOMPOUT 114) is applied by the power source switchover comparator 112. If the supply level of the primary power source drops faster than the predetermined negative rate of change, then the switchover signal (i.e., FSO) is applied from the forced battery switchover circuitry 120. It should be understood that both the power source switchover circuitry 103 and the forced battery switchover circuitry 120 are performing the steps of determining 515 and applying 520 according to the present example.

At step 525, a detection for determining that the switchover signal has been applied is performed. Upon the detection 525 occurring, a switchover from the primary to the secondary power source is performed at step 530. The switchover 530 occurs before the volatile elements lose the stored data.

At step 535, a determination is made as to whether the supply level of the primary power source has returned above the predefined threshold level. If the determination 535 is negative, then the process continues to monitor the supply level of the primary power source. Upon the supply level of the primary power source returning above the predefined threshold level, the power from primary power source is applied to the

system at step 510. The determination 535 is performed by the power source switchover circuitry 103 in combination with the switchover logic circuitry 116.

Referring to FIGURE 6, three exemplary waveforms illustrate the normal operating mode of the monitor and switchover circuitry. The waveforms illustrate both ramp-up and fast ramp-down of the primary power source having a voltage of VCCEXT 106. Initially, the VSO signal 134 indicates that the system is receiving power by the secondary power source as the VSO signal is high. Upon the signal level of the primary power source reaching 2.6V, the VSO signal becomes a low logic level, which causes the switch 136 to switch from the secondary power source to the primary power source.

At 100 microseconds, the VCCEXT signal 106 is decreased to 1.4V within 25 nanoseconds, which causes the forced power source switchover circuitry 120 to react. Upon the VCCEXT signal 106 reaching 2.0V, the FSO signal 138 (not shown) becomes low, which triggers the LVSWITCH signal 140 to become high. Upon the LVSWITCH signal 140 becoming high, the VSO signal, again, becomes high, which causes the switch 136 to switch from the

primary power source to the secondary power source and the stored data in the volatile elements to be maintained.

It should be understood that the monitor and switchover circuitry may be incorporated into a single integrated circuit or may be included on multiple integrated circuits. While the exemplary circuitry presented utilizes specific logic gates, it is contemplated that the principles of the present invention could allow for other logic gates to be utilized and produce the same or similar functionality as herein presented.

The previous description is of a preferred embodiment for implementing the invention, and the scope of the invention should not necessarily be limited by this description. The scope of the present invention is instead defined by the following claims.

WHAT IS CLAIMED IS:

1. An integrated circuit for providing a switchover from a primary power source to a secondary power source, the integrated circuit comprising:

a power source switchover circuit for detecting the supply level of the primary power source and a voltage threshold, the power source switchover circuit having a plurality of input terminals, a first input terminal selectively electrically coupled to the primary power source and a second input terminal selectively electrically coupled to the secondary power source, the power source switchover circuit further having a plurality of output terminals;

a comparator, electrically coupled to the power source switchover circuit, for indicating that the supply level of the primary power source has decreased below the voltage threshold, the comparator having a first and a second input terminal connected to a first and a second output terminal of the power source switchover circuit, respectively, the comparator further having an output terminal;

a forced power source switchover circuit for detecting that the supply level being received from the primary power

source by the integrated circuit drops below a predefined threshold level, the forced power source switchover circuit having at least one input terminal and at least one output terminal, one input terminal being electrically connected to the primary power source; and

a switchover circuit for initiating a switchover operation based upon the indication from the comparator or upon an indication that the forced power source switchover circuit detects that the supply level being received from the primary power source by the integrated circuit drops below the predefined threshold level, the switchover logic circuit having a first input terminal connected to the output terminal of the comparator and a second input terminal connected to one output terminal of the forced power source switchover circuit.

2. The integrated circuit according to claim 1, wherein the forced power source switchover circuit is reactive to the supply level of the primary power source transitioning from a steady-state supply level to below the predefined threshold level, the supply level transitioning faster than a predetermined negative rate of change.

3. The integrated circuit according to claim 2, wherein the negative rate of change is approximately 150 microseconds.

4. The integrated circuit according to claim 1, further comprising circuitry connected to the power source switchover circuit for selectively adjusting the indicating signal produced by the comparator.

5. The integrated circuit according to claim 1, further comprising circuitry connected to the forced power source switchover circuit for selectively adjusting the first predefined threshold level.

6. The integrated circuit according to claim 1, further comprising a plurality of input terminals for receiving input signals to configure the switchover logic circuit to selectively adjust the predefined threshold level.

7. The integrated circuit according to claim 1, further comprising a delay circuit for providing a time duration for the substrate of the integrated circuit to settle from a first voltage potential to a second voltage potential upon the switchover from the secondary power source to the primary power source.

8. The integrated circuit according to claim 1, wherein the predefined threshold level detected by the forced power source switchover circuit is below the crossing level of the supply level of the primary power source and the voltage threshold.

9. A method for performing a power source switchover from a primary power source to a secondary power source, the method comprising the steps of:

detecting that a supply level being received from the primary power source decreases below a predefined threshold level from a steady-state operating level, the supply level transitioning faster than a predetermined negative rate of change;

asserting a signal indicating to switch from the primary power source to the secondary power source upon detecting that the supply level being delivered from the primary power source has decreased below the predefined threshold level;

detecting the signal indicating to switch from the primary power source to the secondary power source; and

switching from the primary power source to the secondary power source based upon detecting the signal indicating to force a power source switchover.

10. The method according to claim 9, wherein the primary power source is an external power source.

11. The method according to claim 9, wherein the secondary power source is a battery.

12. The method according to claim 9, wherein the predefined threshold level is below 2.5 volts.

13. The method according to claim 9, wherein the negative rate of change is approximately 150 microseconds.

14. The method according to claim 9, further comprising the steps of:

detecting the supply level being delivered from the primary power source;

detecting a voltage potential of a substrate of an integrated circuit; and

producing a compare signal indicative of the relative values between the detected supply level being delivered from the primary power source and the voltage potential of the substrate.

15. The method according to claim 14, further comprising the steps of:

receiving the compare signal and the signal indicating to force the power source switchover;

determining an occurrence of a transition of either the compare signal or the signal indicating to force the power source switchover; and

initiating a switch from the primary power source to the secondary power source upon the determination of the occurrence of a transition of the compare signal or the signal indicating to force the power source switchover.

16. A circuit comprising:

a first detection circuit for detecting a supply level decrease of a power level from a primary power source, the supply level transitioning from a steady-state supply level to a predefined threshold level faster than a predetermined negative rate of change, the first circuit generating at least one signal in response to the supply level decreasing to the predefined threshold level; and

a first switching circuit for switching from the primary power source to a secondary power source in response to the at least one signal.

17. The circuit according to claim 16, wherein the primary power source is an external power source.

18. The circuit according to claim 16, wherein the secondary power source is a battery.

19. The circuit according to claim 16, wherein the predetermined negative rate of change is approximately 150 microseconds.

20. The circuit according to claim 16, further comprising circuitry for adjusting a response time for the first detection circuit.

21. The circuit according to claim 16, further comprising:

a second detection circuit for detecting a voltage threshold of the power source switchover circuit and the supply level being received from the primary power source, the second detection circuit producing a plurality of signals based upon the detecting; and

a second switching circuit for switching from the primary power source to the secondary power source in response to the plurality of signals based upon the detecting.

22. The circuit according to claim 21, further comprising circuitry for selectively responding to the first and the second detection circuits.

23. The circuit according to claim 21, further comprising an input terminal to selectively disable a switchover from the primary to the secondary power source.

24. A system comprising:

a volatile device for maintaining data, the volatile device receiving power delivered from a primary power source;

a forced power source switchover circuit for detecting a transition in a supply level from a primary power source, the forced power source switchover circuit reactive to the supply level of the primary power source transitioning from a steady-state operating level to a predefined threshold level, the supply level transitioning at a rate faster than a predetermined negative rate of change; and

a switchover circuit coupled to the forced power source switchover circuit and the volatile device for asserting a switch from the primary power source to a secondary power source to prevent the volatile device from losing data upon power being removed from the volatile device.

25. The system according to claim 24, wherein the predetermined negative rate of change is at most 150 microseconds.

26. The system according to claim 24, wherein the forced power switchover circuit provides an indication to the switchover circuit approximately at the instant of the primary power source crossing the predefined threshold level.

27. The system according to claim 24, further comprising a power source switchover circuit connected to the switchover circuit, the power source switchover circuit detecting that the power being delivered from the primary power source transitioning below a trip point, the transitioning occurring at a rate slower than the predetermined negative rate of change.

28. The system according to claim 24, wherein the system includes at least one of the following: a memory system, a computing system, a communication system, and a clock system.

29. The system according to claim 24, wherein the volatile device includes at least one of the following: a memory device and a clock device.

30. A circuit for providing an indication that a signal level of a primary power source transitions below a predefined threshold level, the circuit comprising:

a first transistor electrically coupled to a second transistor, a common node being formed along the coupling;

a third transistor having a gate terminal coupled to the common node;

at least one pair of series connected trimming transistors, a first transistor of the at least one pair of trimming transistors having a gate terminal coupled to the common node, the at least one pair of series connected trimming transistors coupled to a drain/source region of the third transistor.

31. The circuit according to claim 30, further including a fuse electrically coupled to a gate terminal of a second transistor of the at least one pair of trimming transistors, the fuse being blown to selectively turn on/off the second transistor of the at least one pair of trimming transistors.

32. The circuit according to claim 30, wherein the first transistor is coupled to the primary power source and a gate terminal of the second transistor is coupled to a substrate of the circuit.

ABSTRACT OF THE DISCLOSURE

An integrated circuit and method for providing a switchover from the primary power source to the secondary power source to prevent a volatile element from losing stored data. The integrated circuit includes a forced power source switchover circuit for detecting that the supply level of the primary power source drops below a predefined threshold level. A switchover circuit on the integrated circuit initiates a switchover operation based upon the forced power source switchover circuit detecting that the supply level being received from the primary power source drops below the predefined threshold level. The detection by the forced power source switchover circuitry may occur on a signal level that transitions faster than a predetermined negative rate of change. The integrated circuit may be incorporated in any system having volatile elements, such as memory or a clock.

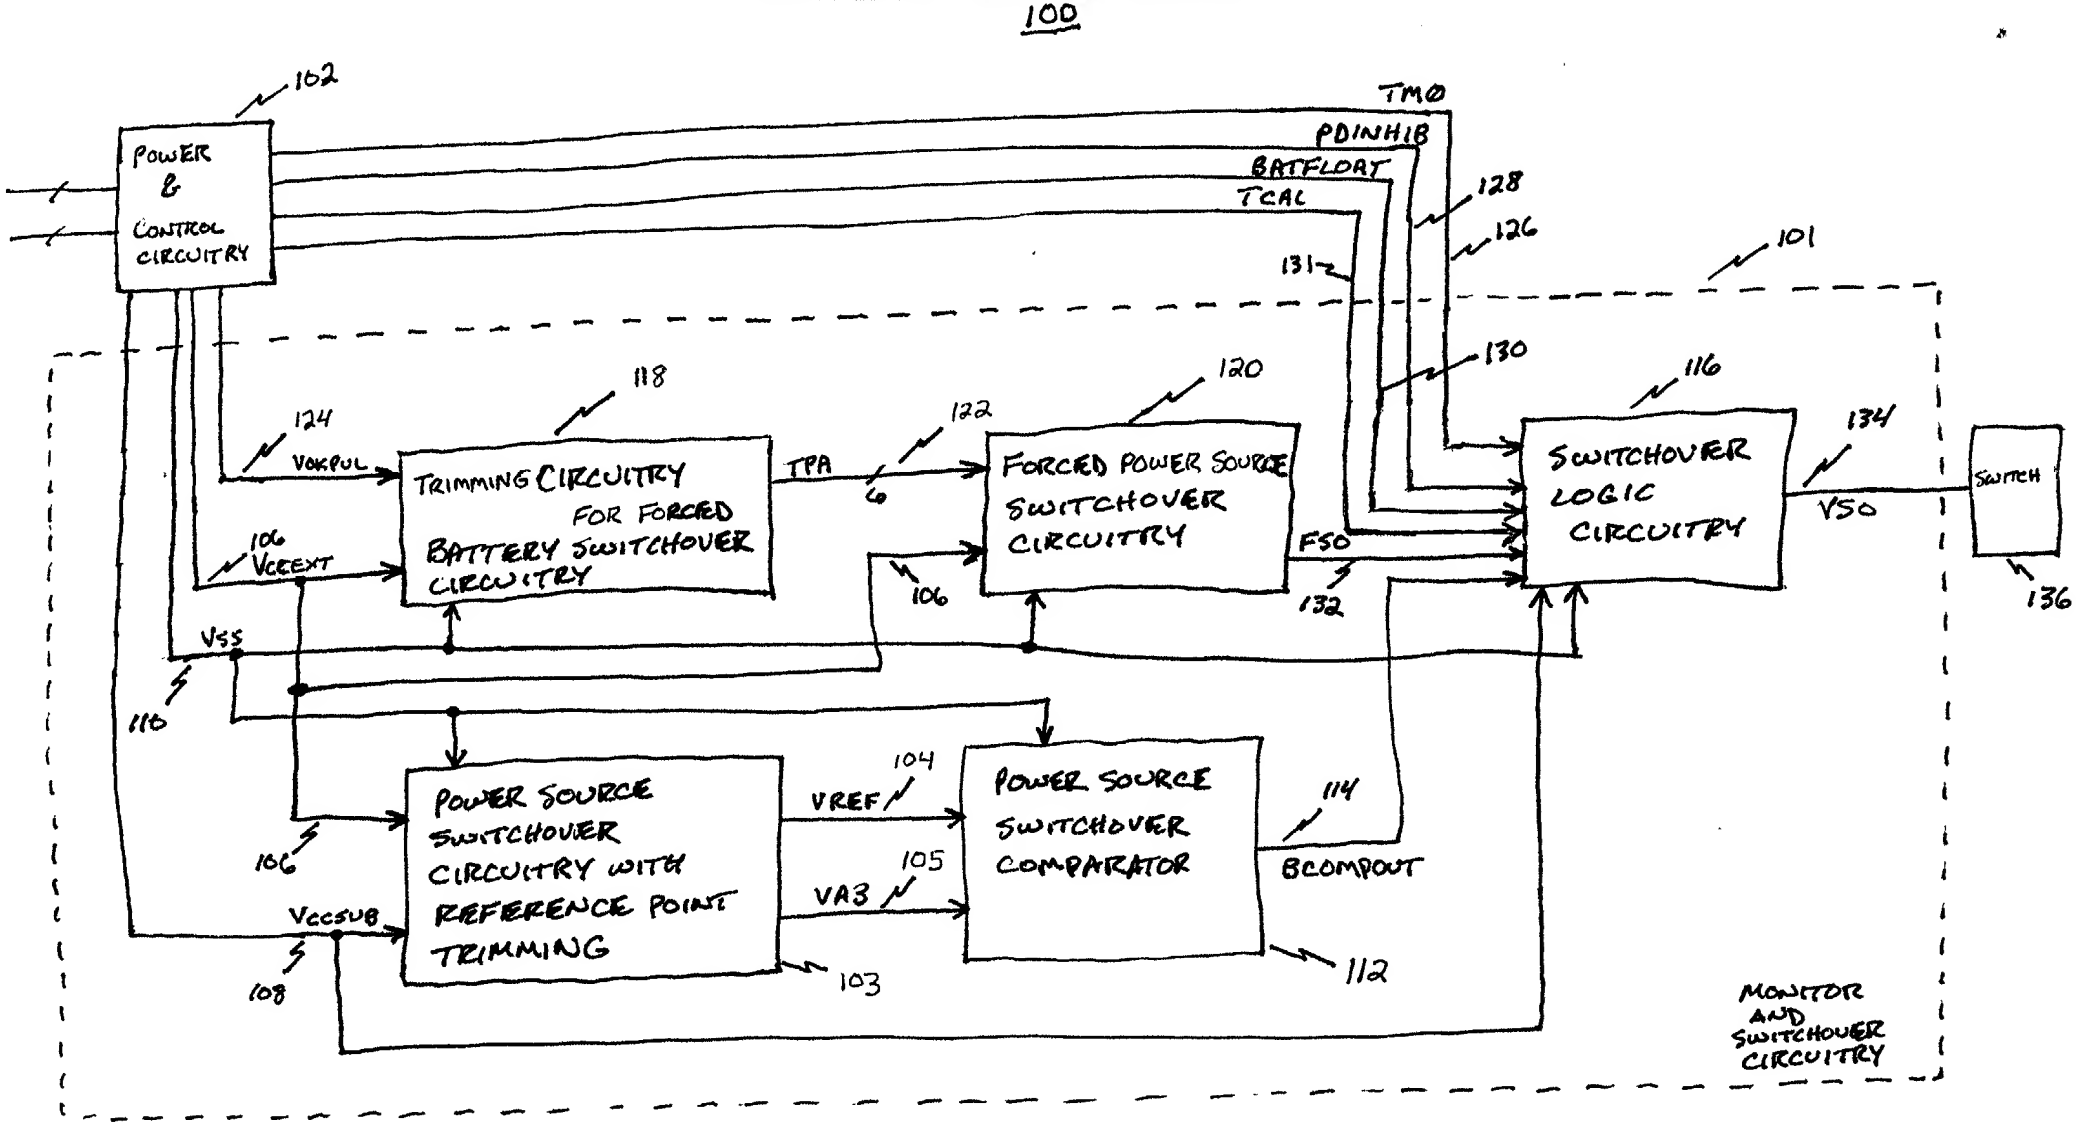

FIG. 1

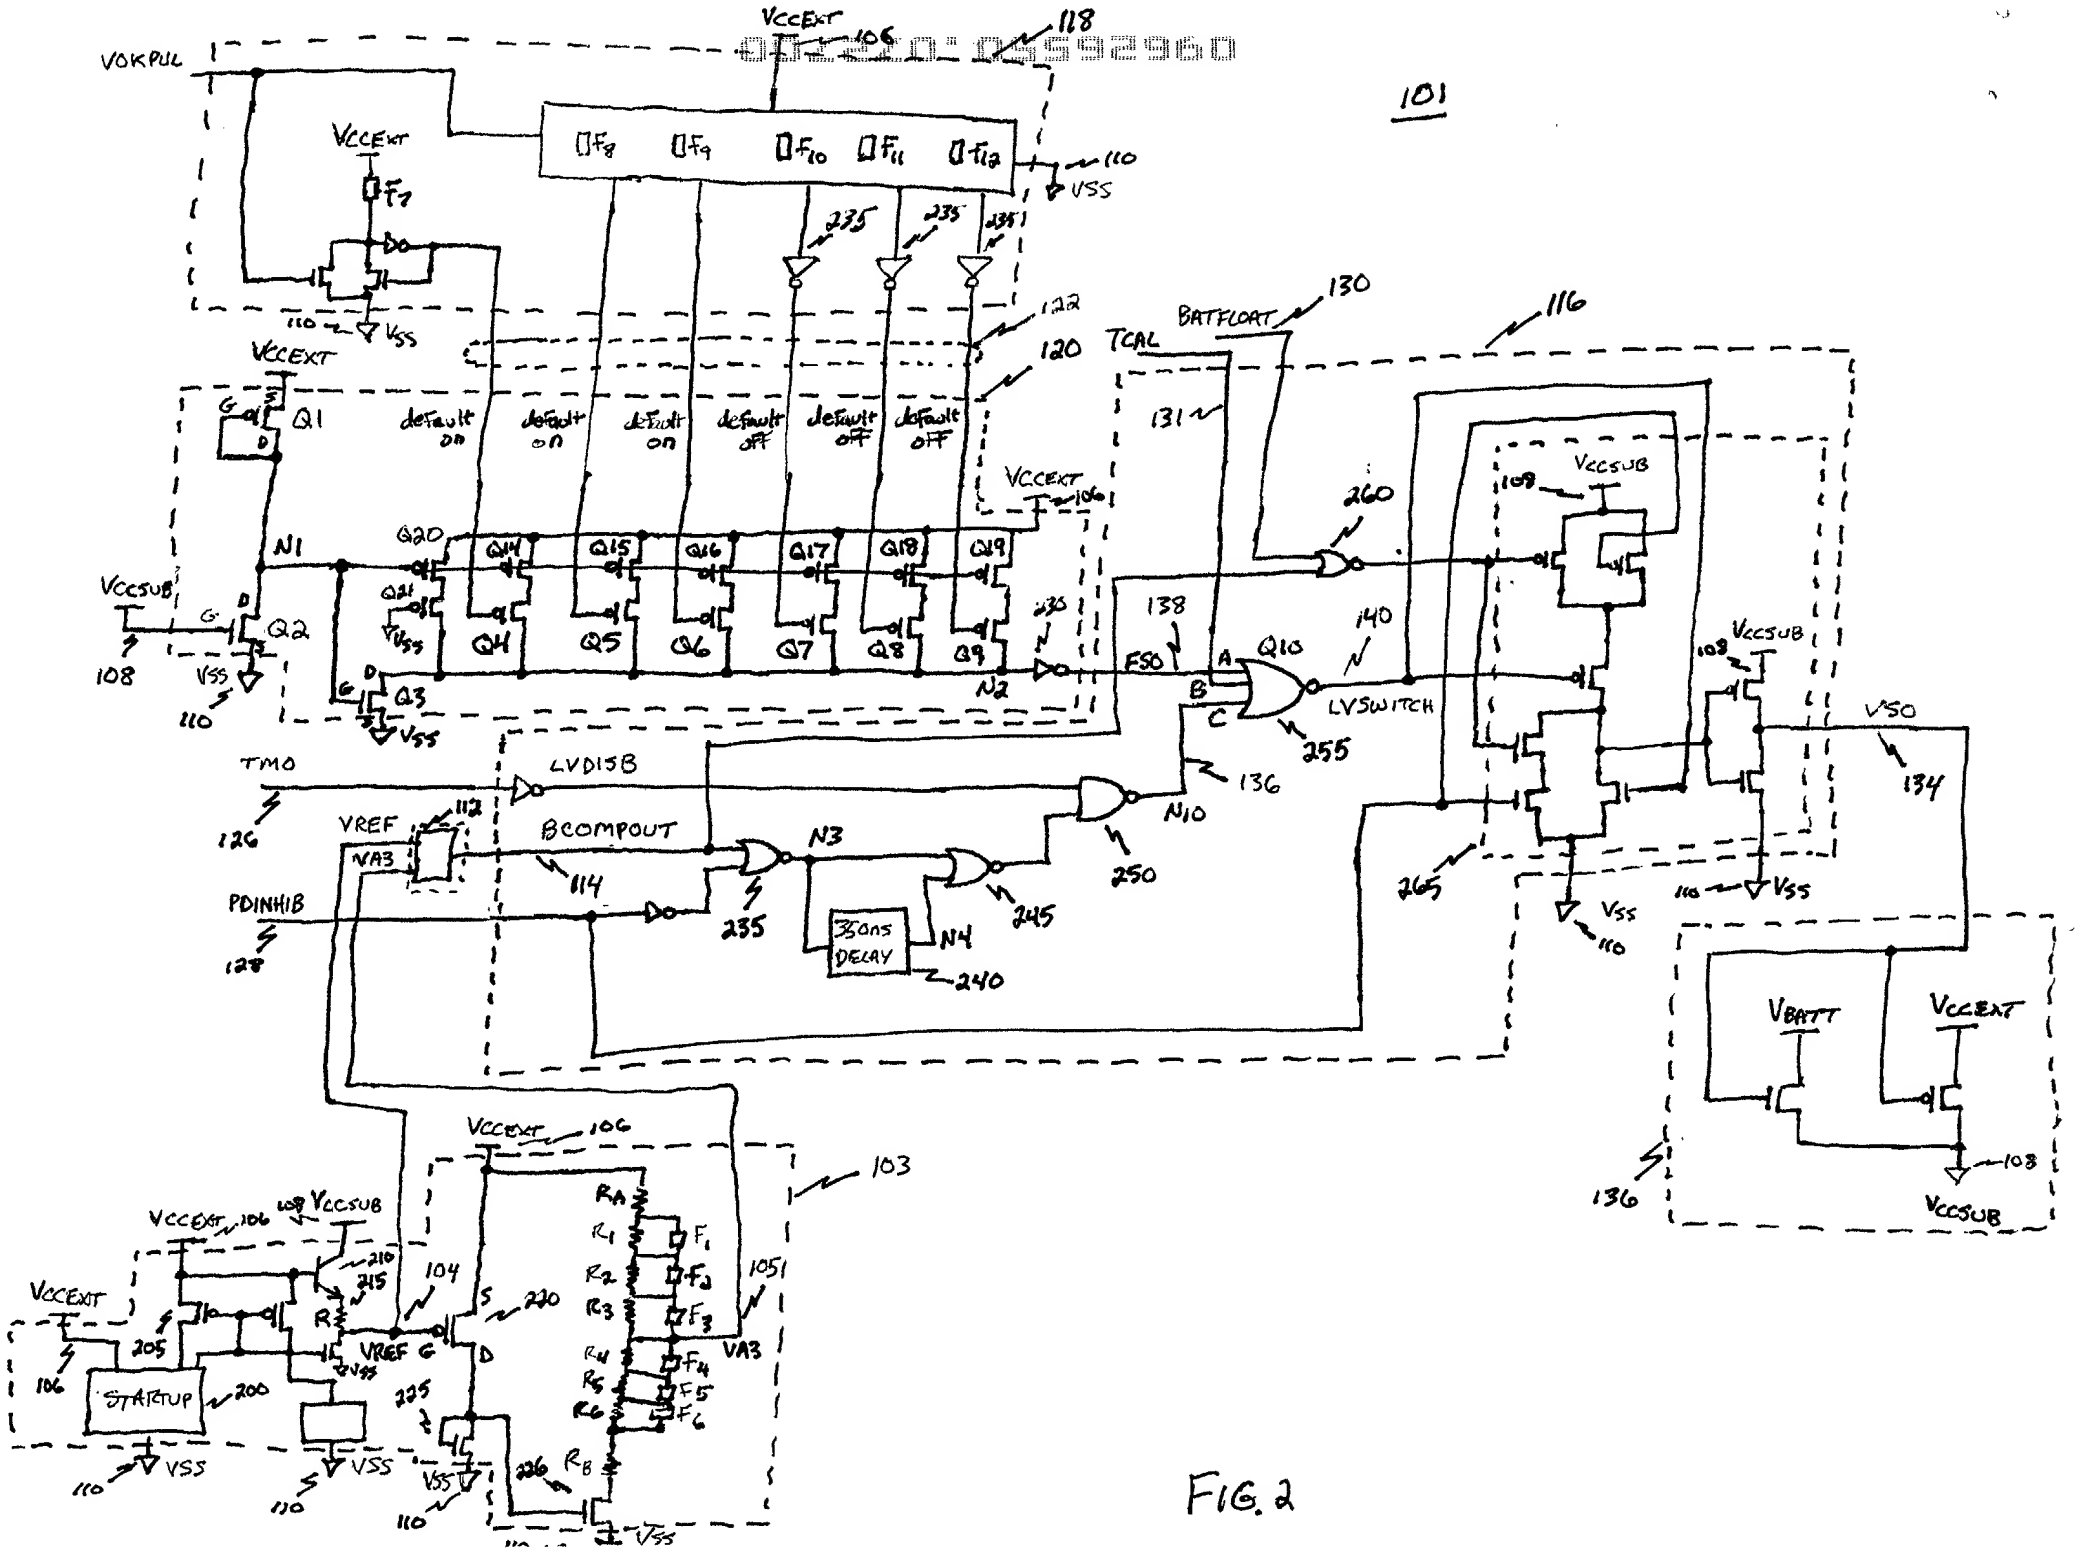
101
VCCEXT
118
106
VOKPUL
F8 F9 F10 F11 F12
110
VSS
F7
235
122
120
130
BATFLOAT
TCAL
116
131
default on
default on
default on
default off
default off
default off
Q1
Q2
Q3
Q4
Q5
Q6
Q7
Q8
Q9
Q10
Q20
Q21
Q14
Q15
Q16
Q17
Q18
Q19
N1
N2
VCCSUB
108
260
138
140
FSO
LVSWITCH
255
136
TMO
126
LVDISB
VREF
112
VA3
BCOMPOUT
114
PDINHIB
128
N3
N4
N10
250
245
240
235
35ons DELAY
265
VSO
134
VBATT
VCCEXT
136
103
104
105
STARTUP
200
205
210
215
220
225
226
RA
R1
R2
R3
R4
R5
R6
RB
F1
F2
F3
F4
F5
F6

FIG. 2

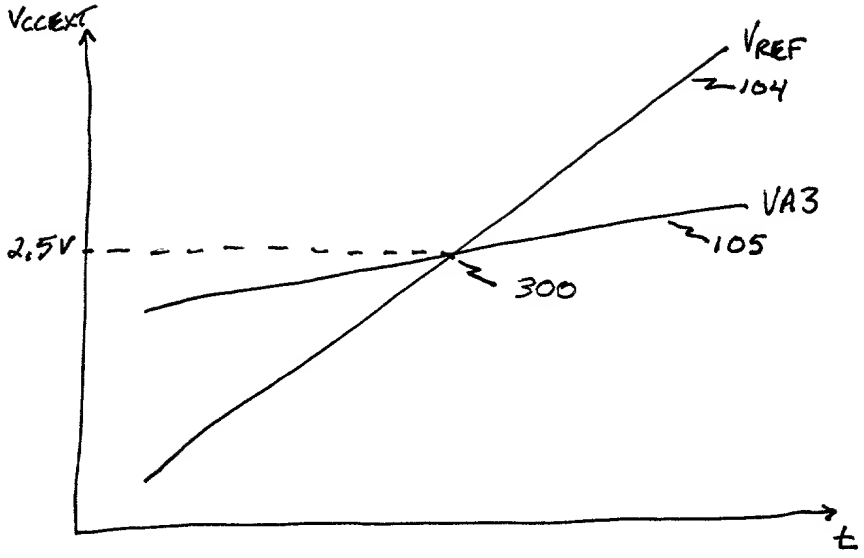

FIG. 3

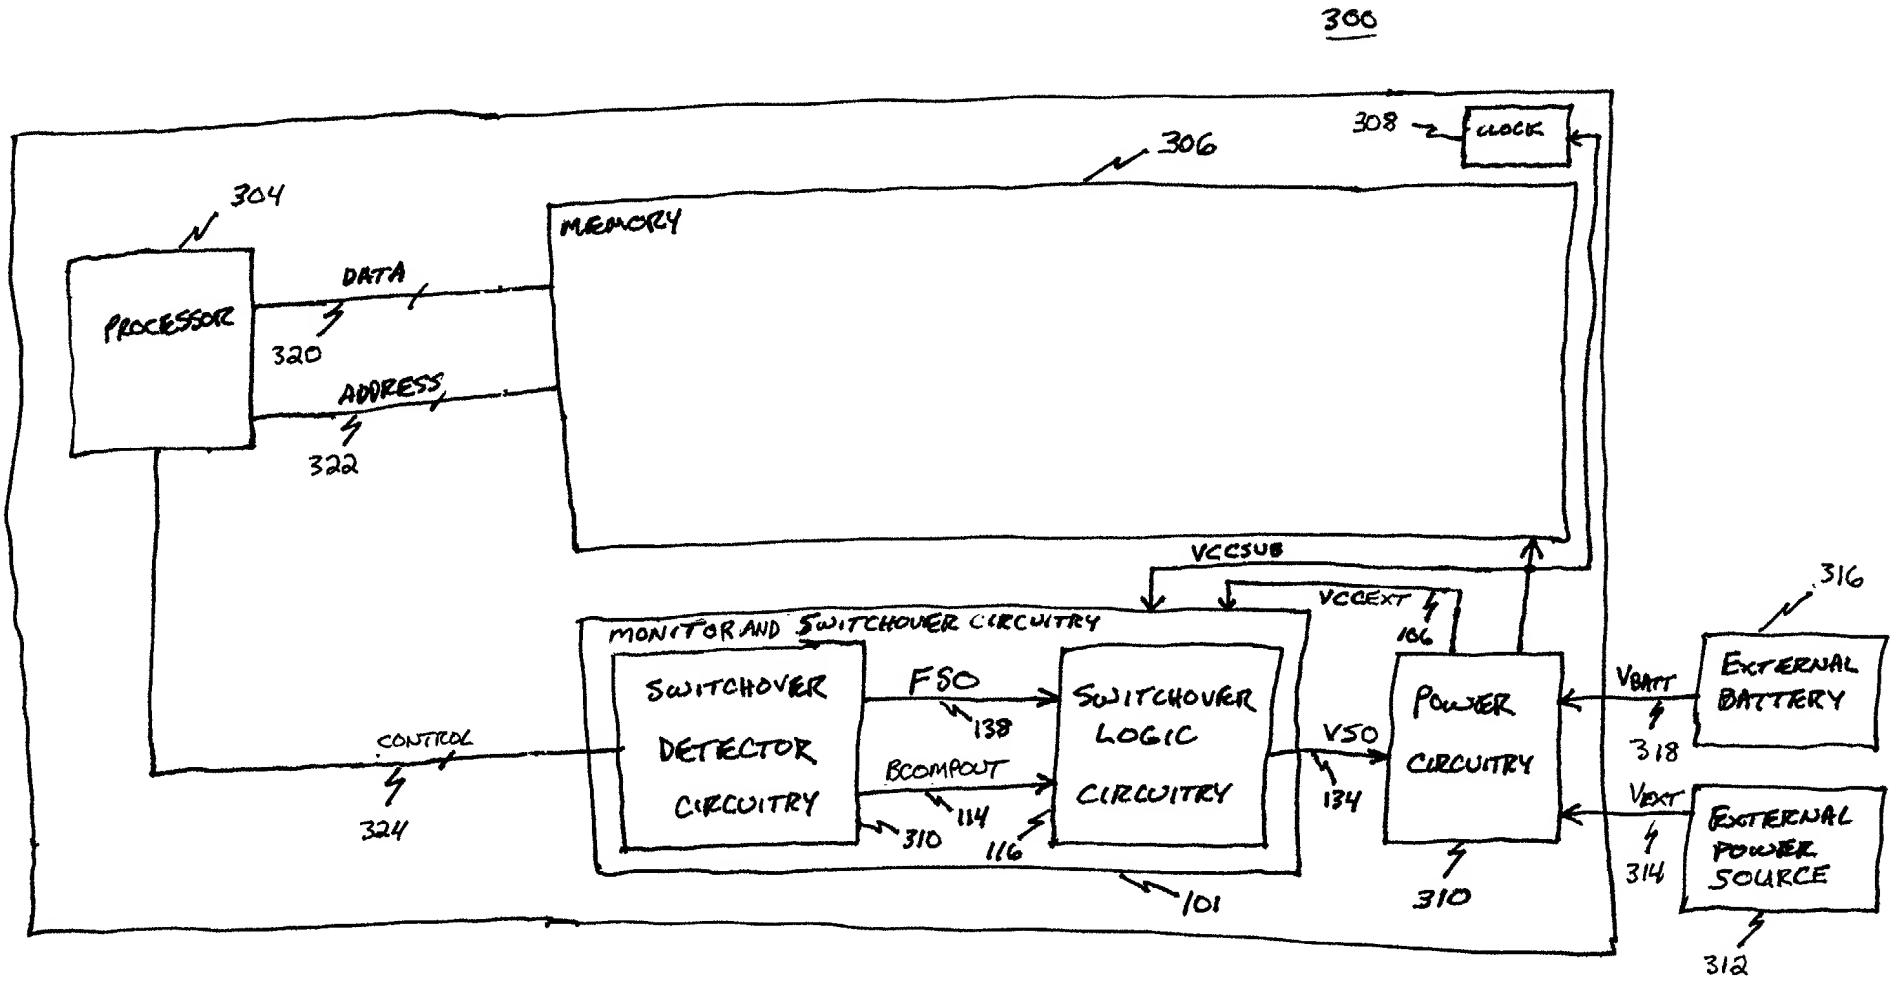
300
308
CLOCK
306
304
MEMORY
PROCESSOR
DATA
320
ADDRESS
322
VCCSUB
VCCEXT
106
316
MONITOR AND SWITCHOVER CIRCUITRY
SWITCHOVER DETECTOR CIRCUITRY
FSO
138
BCOMPOUT
114
310
116
SWITCHOVER LOGIC CIRCUITRY
VSO
134
POWER CIRCUITRY
VBATT
318
EXTERNAL BATTERY
VEXT
314
EXTERNAL POWER SOURCE
312
CONTROL
324
101
310

FIG. 4

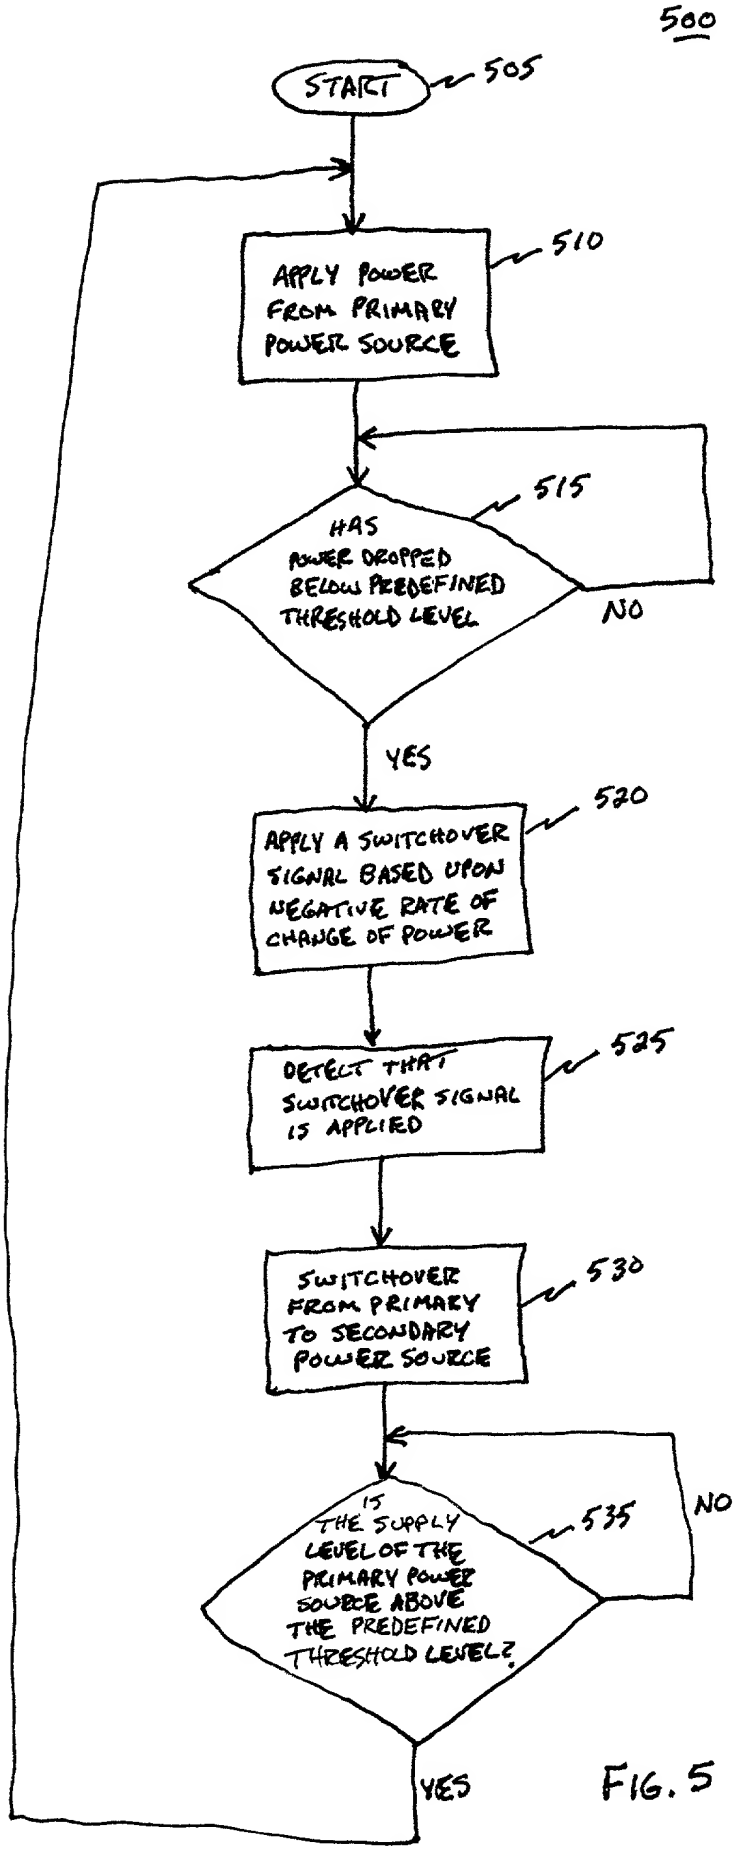
500
START
505
APPLY POWER FROM PRIMARY POWER SOURCE
510
HAS POWER DROPPED BELOW PREDEFINED THRESHOLD LEVEL
515
NO
YES
APPLY A SWITCHOVER SIGNAL BASED UPON NEGATIVE RATE OF CHANGE OF POWER
520
DETECT THAT SWITCHOVER SIGNAL IS APPLIED
525
SWITCHOVER FROM PRIMARY TO SECONDARY POWER SOURCE
530
IS THE SUPPLY LEVEL OF THE PRIMARY POWER SOURCE ABOVE THE PREDEFINED THRESHOLD LEVEL?
535
NO
YES

FIG. 5

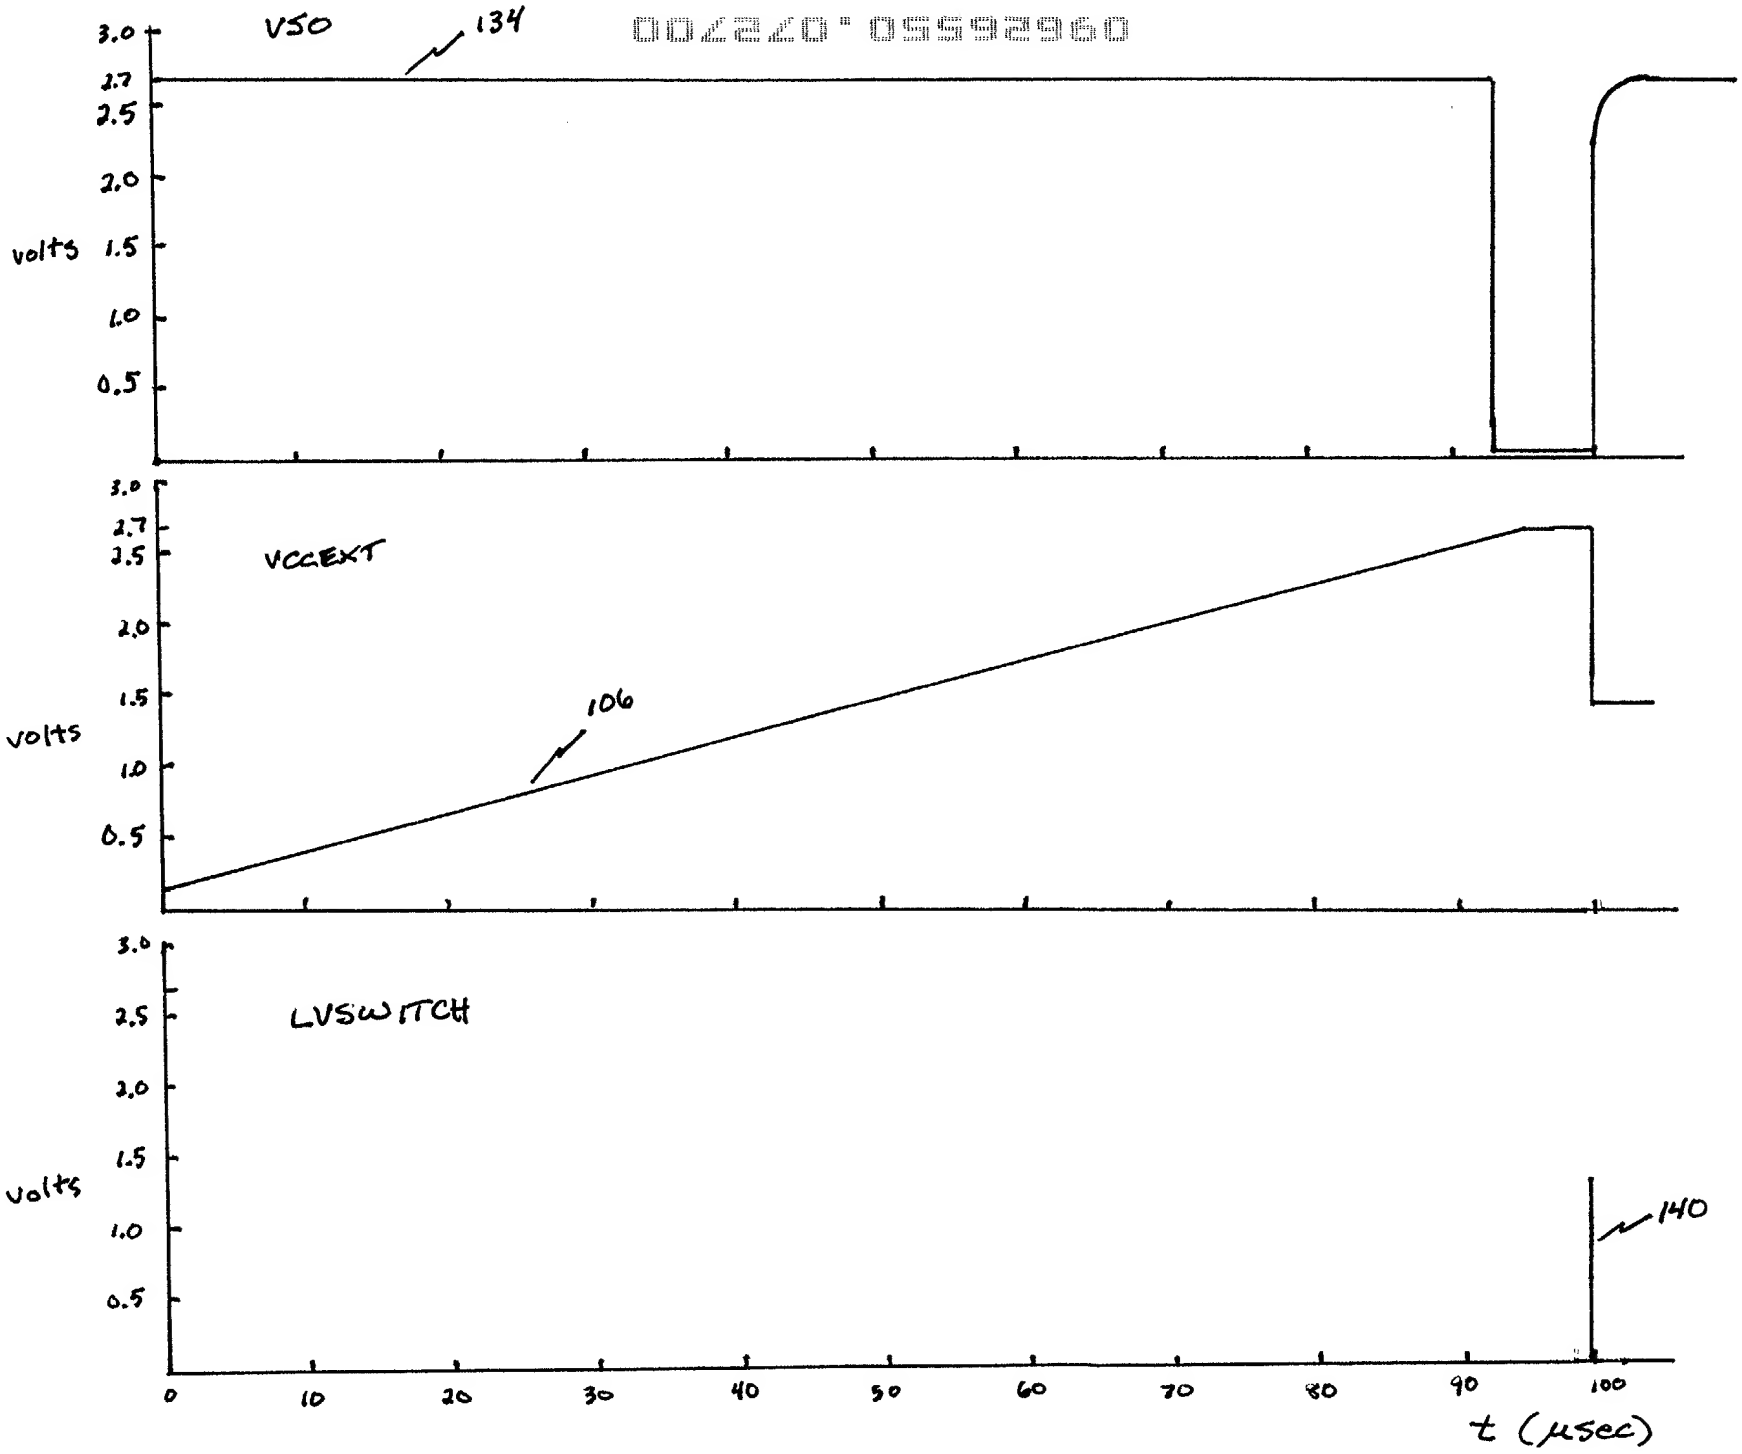

FIG. 6

PATENT APPLICATION
Attorney Docket No. 28940-55USPT
Client Ref. No. 99-C-179

RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **METHOD AND CIRCUIT FOR SWITCHOVER BETWEEN A PRIMARY AND A SECONDARY POWER SOURCE**, the specification of which: (mark only one)

___	(a)	is attached hereto.
__	(b)	was filed on _ as Application Serial No. __ and was amended on _____ (if applicable)
___	(c)	was filed as PCT International Application No. PCT/_____ on ____ and was amended on _____ (if applicable).
___	(d)	was filed on ___ as Application Serial No. ___ and was issued a Notice of Allowance on ____.
___	(e)	was filed on ___ and bearing attorney docket number ____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application

on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

Number	Country	Month/Day/Year Filed	Date first laid-open or Published	Date patented or Granted	Priority Claimed Yes	No
NONE						

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

Application No. (series code/serial no.)	Month/Day/Year Filed	Status(pending, abandoned, patented)
NONE		

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: LISA K. JORGENSON, Reg. No. 34,845, ROBERT D. McCUTCHEON, Reg. No. 38,717, and THEODORE E. GALANTHAY, Reg. No. 24,122, of STMicroelectronics, Inc. of 1310 Electronics Drive, Carrollton, Texas 75006-5039; and ANDRE M. SZUWALSKI, Reg. No. 35,701, GARY B. SOLOMON, Reg. No. 44,347, and WILLIAM F. ESSER, Reg. No. 38,053 of the firm of **JENKENS & GILCHRIST, P.C.**, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799;

Please address all correspondence and direct all telephone calls to:

Lisa K. Jorgenson, Esq.
STMicroelectronics, Inc.
1310 Electronics Drive
Carrollton, Texas 75006-5039
(972) 466-6000

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	DAVID C. McCLURE **Full Name**	**Inventor's Signature**	**Date**
	3701 Elizabeth Dr. Carrollton, Texas 75007 **Residence** (city, state, country)		USA **Citizenship**
	3701 Elizabeth Dr. Carrollton, Texas 75007 **Post Office Address** (include zip code)		

2	TOM YOUSSEF **Full Name**	**Inventor's Signature**	**Date**
	3131 Renaissance Dr. Dallas, Texas 75287 **Residence** (city, state, country)		USA **Citizenship**
	3131 Renaissance Dr. Dallas, Texas 75287 **Post Office Address** (include zip code)		